



CABLE- SMALL BORE HOSE FLOATS


Cable floats represent another important production line within the Floatex range of manufactured goods.

These are very similar to the dredging floats, but are thought for installation on pipes or cable of small dimensions. The hereunder reported table perfectly shows both the dimensions where these floats can be used and the several water depths these floats are able to reach, depending on the customer's needs.


Where the floats have to be used up to 500 m, the internal filling is made with polyurethane. Where the floats have to be used up to 2500 m, the internal filling is made with syntactic material. Of course, even deeper water depths can be reached upon client request.

CABLE -SMALL BORE FLOATS

CABLE AND SMALL BORE						
TYPE	WATER DEPTH	INSIDE DIAMETER (mm)	OUTSIDE DIAMETER (mm)	Length (mm)	WEIGHT (Kg)	BUOYANCY (Kg)
CF 50-640	EMPTY	50	345	640	6	42
	-10	50	345	640	8	40
	-40	50	345	640	10	38
	-90	50	345	640	12.8	35
	-150	50	345	640	14.3	34
	-240	50	345	640	16.8	31
	-340	50	345	640	19	29
	-500	50	345	640	21	26
	-2500	50	345	640	34	14

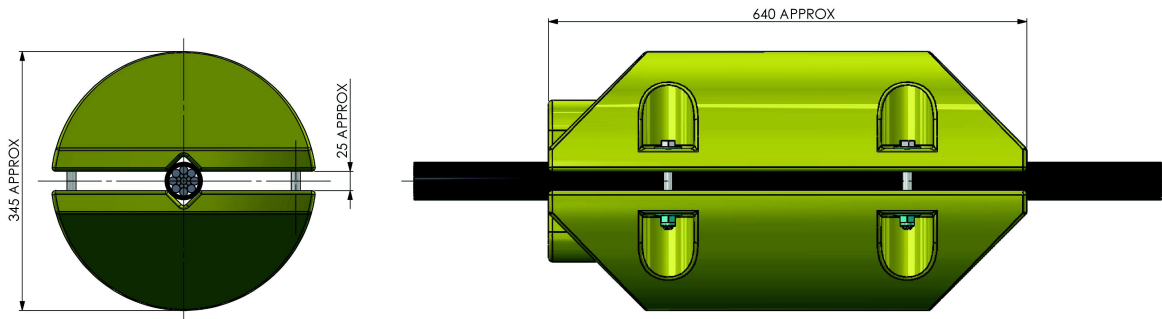


CABLE AND SMALL BORE						
TYPE	WATER DEPTH	INSIDE DIAMETER (mm)	OUTSIDE DIAMETER (mm)	Length (mm)	WEIGHT (Kg)	BUOYANCY (Kg)
CF 50-410	EMPTY	50	370	410	6	30
	-10	50	370	410	7.5	28.5
	-40	50	370	410	9.1	27
	-90	50	370	410	11	25
	-150	50	370	410	12.2	24
	-240	50	370	410	14.1	22
	-340	50	370	410	15.7	20.4
	-500	50	370	410	16.6	18.5
	-2500	50	370	410	27	9

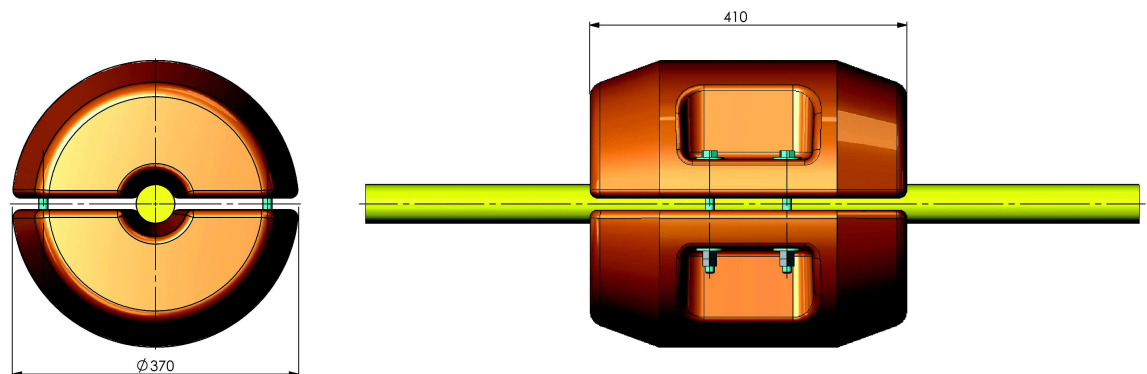




CABLE AND SMALL BORE						
TYPE	WATER DEPTH	INSIDE DIAMETER (mm)	OUTSIDE DIAMETER (mm)	Length (mm)	WEIGHT (Kg)	BUOYANCY (Kg)
CF 85-410	EMPTY	85	370	410	6	28
	-10	85	370	410	7.5	27.6
	-40	85	370	410	9.1	27
	-90	85	370	410	11	25
	-150	85	370	410	12	24
	-240	85	370	410	14	22
	-340	85	370	410	14.7	20.4
	-500	85	370	410	17.6	18.4
	-2500	85	370	410	27	9

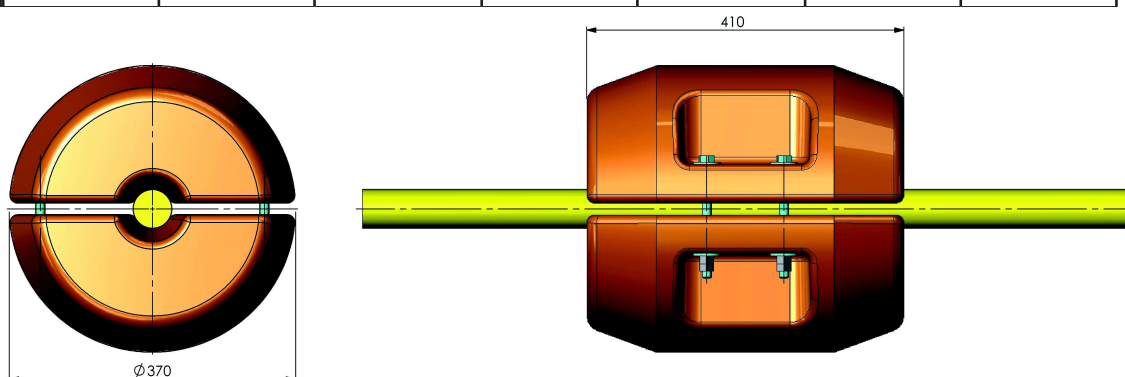


CABLE AND SMALL BORE						
TYPE	WATER DEPTH	INSIDE DIAMETER (mm)	OUTSIDE DIAMETER (mm)	Length (mm)	WEIGHT (Kg)	BUOYANCY (Kg)
CF105-410	EMPTY	105	370	410	6	28
	-10	105	370	410	7.5	27.6
	-40	105	370	410	9.1	27
	-90	105	370	410	11	25
	-150	105	370	410	12	24
	-240	105	370	410	14	22
	-340	105	370	410	15.7	20.4
	-500	105	370	410	17.6	18.4
	-2500	105	370	410	27	9

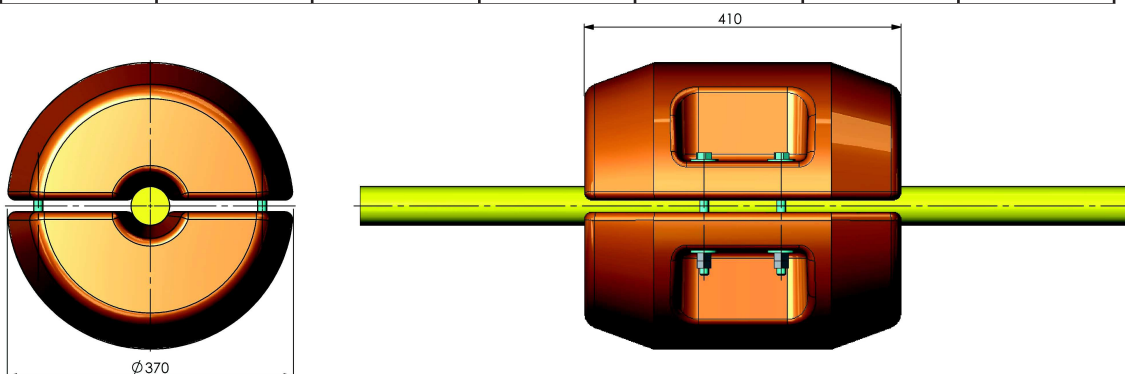


CABLE -SMALL BORE FLOATS

CABLE AND SMALL BORE						
TYPE	WATER DEPTH	INSIDE DIAMETER (mm)	OUTSIDE DIAMETER (mm)	Length (mm)	WEIGHT (Kg)	BUOYANCY (Kg)
CF 160-410	EMPTY	160	370	410	6	23
	-10	160	370	410	7.2	21.7
	-40	160	370	410	8.5	20.4
	-90	160	370	410	10	19
	-150	160	370	410	11	18
	-240	160	370	410	12.5	16.4
	-340	160	370	410	13.8	15.1
	-500	160	370	410	15.3	13.6
	-2500	160	370	410	23	6

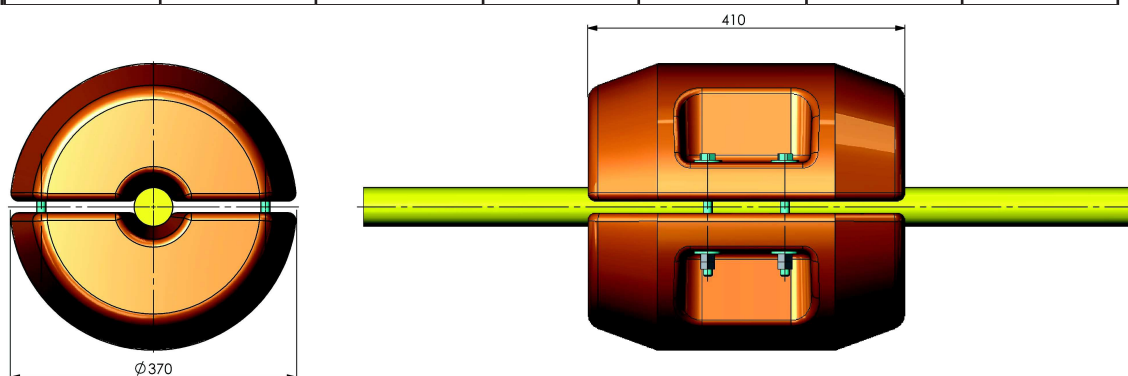

CABLE AND SMALL BORE						
TYPE	WATER DEPTH	INSIDE DIAMETER (mm)	OUTSIDE DIAMETER (mm)	Length (mm)	WEIGHT (Kg)	BUOYANCY (Kg)
CF200-570	EMPTY	200	570	600	16	112
	-10	200	570	600	22	106
	-40	200	570	600	28	99
	-90	200	570	600	36	96
	-150	200	570	600	40	86
	-240	200	570	600	48	79
	-340	200	570	600	55	73
	-500	200	570	600	62	65
	-2500	200	570	600	100	27

A SPECIAL URETHANE CLAMP REDUCER CAN BE INSERTED INSIDE FLOAT "220-570" TO ENABLE OF CABLE OR HOSE FROM 50 TO 160 MM OUTSIDE DIAMETER

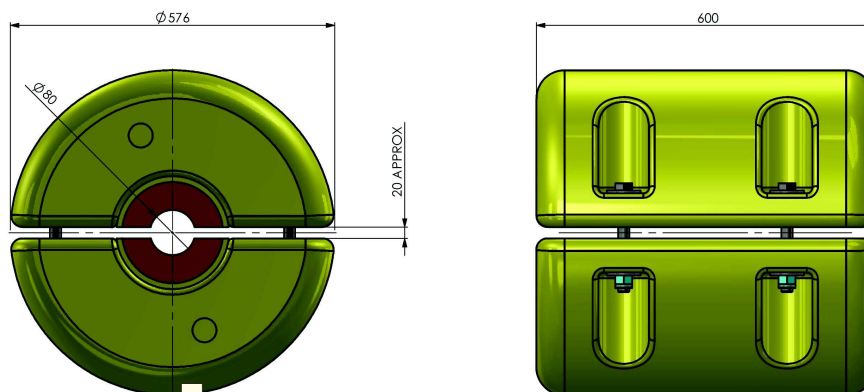

FLOATEX

www.floatex.com